

# HOSE

## Non-Conductive

1/4 in I. D.  
10,000 psi

### NON-CONDUCTIVE HOSES


- For applications requiring electrical isolation.
- 3/8" NPTF fittings on both ends
- Leakage factor of less than 50 microampere.
- Orange polyurethane for easy identification.
- Covering is not perforated, preventing moisture from entering the hose and affecting its overall conductivity.
- Hoses feature a minimum 40,000 psi burst pressure.



TWH

#### HOSES – DUAL LINE

<b>TWH15</b>	15', 1/4" ID non-conductive
<b>TWH20</b>	20', 1/4" ID non-conductive
<b>TWH50</b>	50', 1/4" ID non-conductive

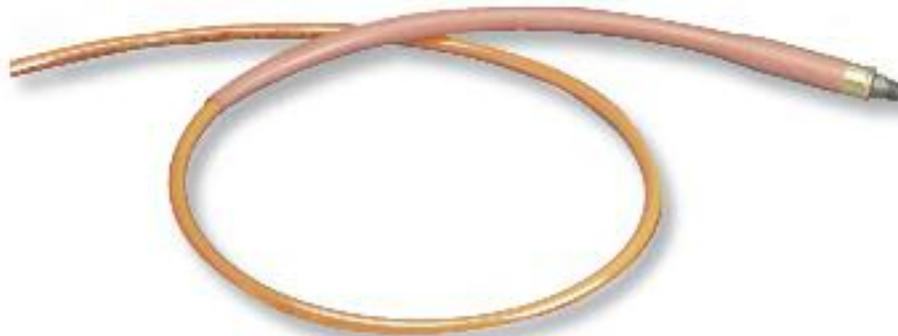

ACCESSORIES



Hose No.	Couplers/ Fitting	I. D. in.	Length ft.
<b>9773</b>	1/4" fitting	1/4	6
<b>9774</b>	1/4" fitting	1/4	10
<b>2000351</b>	1/4" fitting	1/4	15
<b>2000350</b>	1/4" fitting	1/4	25
<b>3-3944*</b>	Male/Male Couplers	1/4	6
<b>3-3945*</b>	Male/Male Couplers	1/4	10
<b>3-3946*</b>	Male/Male Couplers	1/4	15
<b>3-3947*</b>	Male/Male Couplers	1/4	25
<b>3-3956*</b>	Male/Female Couplers	1/4	6
<b>3-3957*</b>	Male/Female Couplers	1/4	10
<b>3-3958*</b>	Male/Female Couplers	1/4	15
<b>3-3959*</b>	Male/Female Couplers	1/4	25

\* Hoses are prefilled with hydraulic fluid